


Turn on procedure:

1. Locate the power strip below the soundboard and turn it on:



2. Turn on the amp rack in the rear of the stage in the following order:

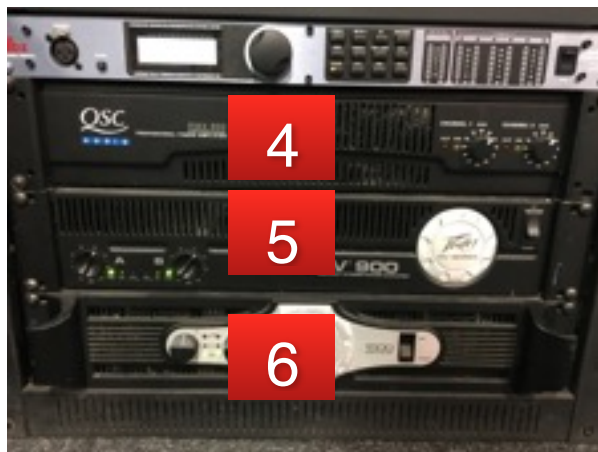

3. If you need to use the projector, locate the remote in the draw in the rack and press the on button (It will take up to 30 seconds for the projector to respond with the Optima logo. I usually press the button a few times to make sure. Please be careful not to 'ovepress' the button'):




4. If using the computer, locate the power strip below the computer and turn it on:



5. Locate the power button on the computer and turn it on.
6. Switch the scaler (located below the drawer in the rack) to 'PC' if not already selected:



7. Turn 'Main' fader up to 50% ('Main' fader automatically zeros out for safety when the board turns on).

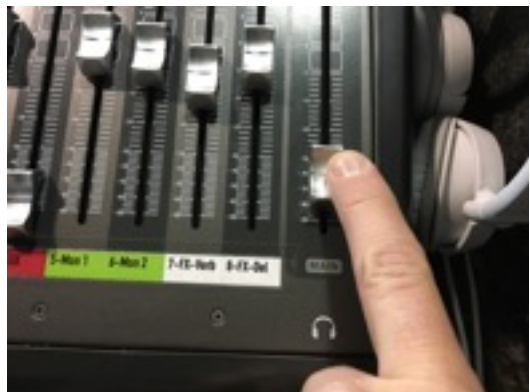

8. Select appropriate layer and make sure mute button is off. Set fader to 50%



9. Select appropriate DCA and make sure mute button is off. Set fader to 50%



10. Adjust channel volume as necessary.

Shutdown Procedure:

1. Turn off Amps first, followed by the board.

